



**PART# 1188 2008 F-250 COWL HOOD
PART# 1189 2008 F-250 RAM AIR HOOD**

**Notice: Prefit Before Painting!
Painted or Altered Parts are Non-Refundable!**

- STEP 1: Install the hood and adjust it until proper alignment with matching panels is achieved.
- STEP 2: Remove the striker bar from the factory hood and install it with Locktite® to your new hood with the provided one inch bolts and lock washers.
- STEP 3: Adjust primary latch until the striker bar fits into the latch. Make sure when the hood is closed you can hear the striker bar “click” into the latch.
- STEP 4: After you here it click, test it to be sure it’s working properly by grabbing the front edge of the hood and slowly pulling upward with a steady even pressure. If the hood opens it’s not adjusted properly; repeat STEP 3 until hood cannot be pulled open after it’s closed.

WARNING: MAKE SURE THE SAFETY CATCH IS WORKING PROPERLY!

- STEP 5: To ensure the safety catch is working properly, close the hood, pull the hood release from inside the car and the hood will partially open. Slowly pull upward on the hood and jiggle it at the same time. If it opens without pulling the safety catch lever then the latch needs to be re-adjusted. The safety catch prevents the hood from opening in the event the primary latch fails.
- STEP 6: Locate the hood stoppers  located on the radiator support. Adjust upward until they apply a small amount of pressure to the underside of the hood when it is closed. This will prevent the hood from shaking or rocking.
- STEP 7: Re-install the factory engine compartment light **as shown in fig.A**. Then install the winsheild washer squirters to the back of the hood with the supplied philips screws **as shown in fig.B**.
- STEP 8: Align the clips in the grill, with the slotted openings in the front of the hood. Push down on the grill, locking the clips in place. When bolting the grill to the grill brackets it maybe nesecary to shim the top of the brackets where it meets the hood with washers **as shown in fig.C**. This will lower the top of the grill down closer to the top of the hood.

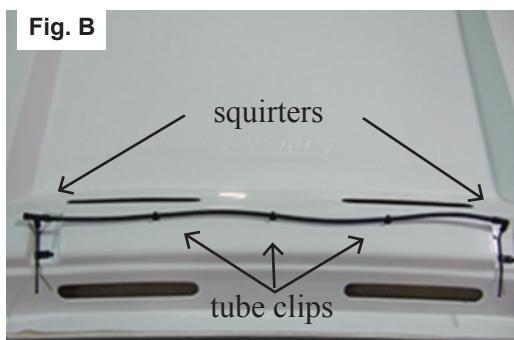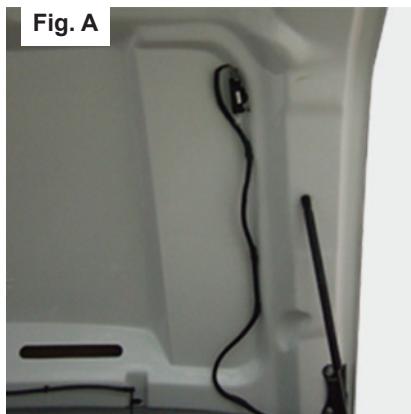

PART #1188 & 1189

QTY	DESCRIPTION	HARDWARE #
4	1" BOLTS	10947-01380
16	WASHERS	33004
2	SQUIRTERS	BER001
4	TUBE CLIPS	WE2546
2	SMALL PHILLIPS SCREWS	10947-01704

