

PART #2230 05-08 MUSTANG PEDESTAL WING

Notice: Pre-fit before painting. Install new, unpainted parts according to these instructions. Then remove parts, paint them and re-install. Painted or Altered Parts are Non-Refundable.

DO NOT fill in vent holes on the underside of the wing.
DO NOT blow air into vent holes, it will damage the part.

The flat washers **MUST** be used in conjunction with the bolts when attaching the wing. This pedestal wing can be installed by itself as a factory replacement wing or along with part # 4325 rear extensions.

Installation as a factory replacement wing: Remove the factory wing. Assemble the pedestals onto the wing as shown in fig. A. Mount the wing along with the pedestal gaskets to the trunk with one bolt in each side. (thread the bolt through the rear hole of the trunk and into the rear thread of the pedestal). Tape the gasket to the trunk as shown in fig. B, then remove the bolts and the wing from the trunk. This gasket is now your template for drilling the other hole for mounting the wing as shown in fig. C. Once the hole has been drilled install the wing with the bolts and washers to the trunk.


Fig. A



Fig. B



Fig. C

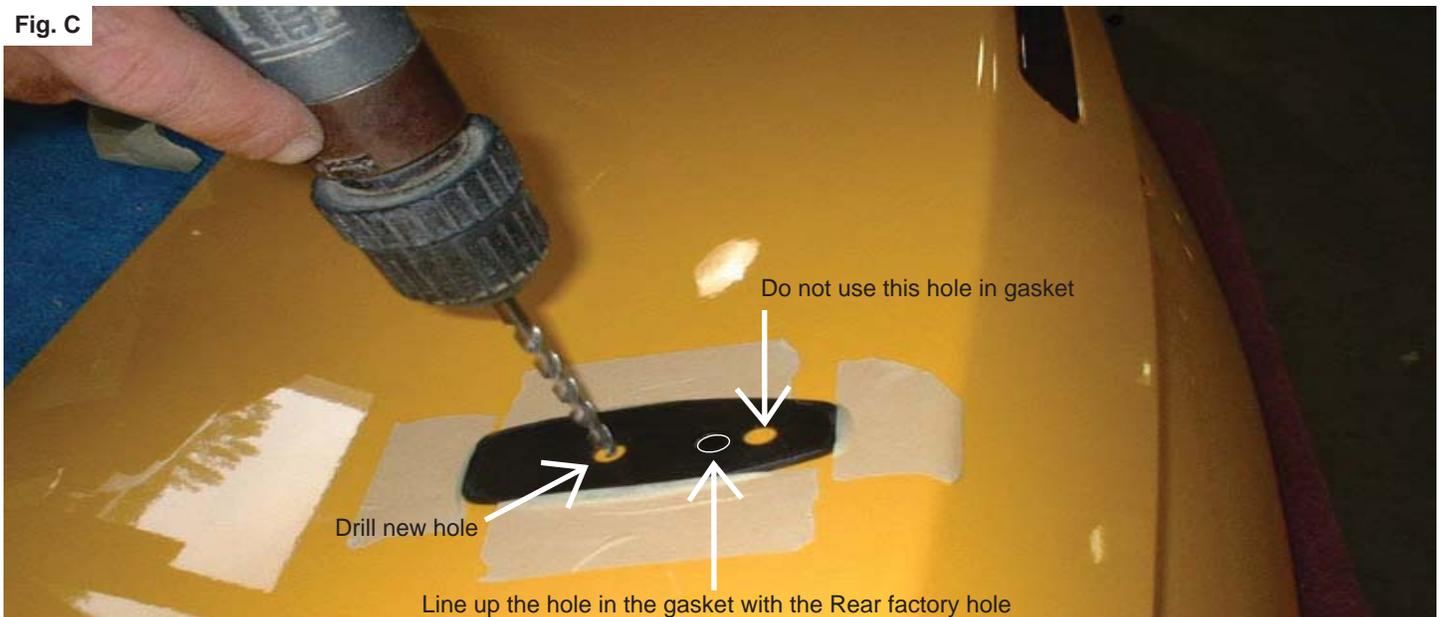

Installation along with part # 4325 rear extensions: Remove the factory wing. Assemble the pedestals onto the wing **as shown in fig. A**. Mount the wing along with the pedestal gaskets to the trunk with one bolt in each side. (thread the bolt through the front hole of the trunk and into the rear thread of the pedestal). Tape the gasket to the trunk **as shown in fig. B**, then remove the bolts and the wing from the trunk. This gasket is now your template for drilling the other hole for mounting the wing **as shown in fig. D**. Use the long studs to mount the wing in the new drilled holes.


Fig. A



Fig. B



Fig. D

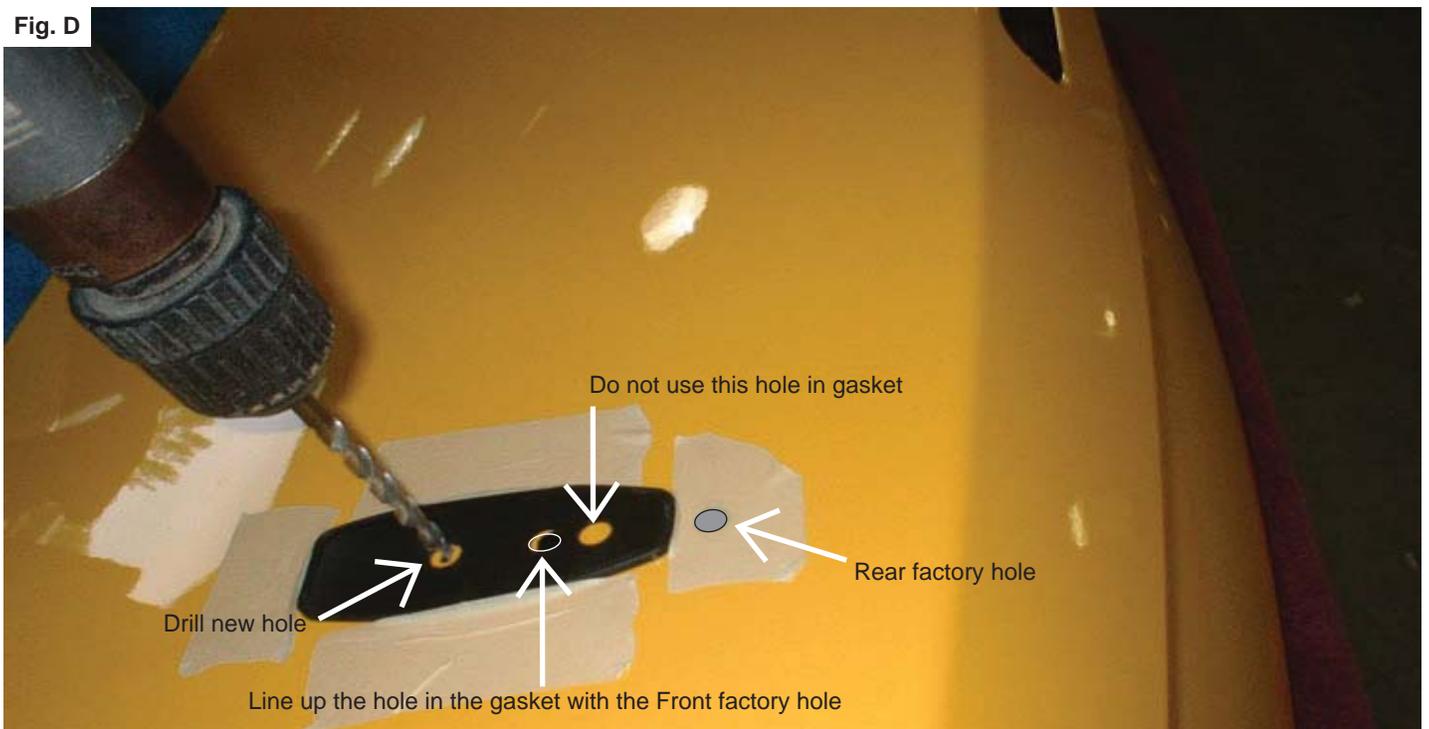

PART #2230		
QTY	DESCRIPTION	HARDWARE #
2	PEDESTALS W/GASKET & HARDWARE PACKET	D1ZZ6344210HD
4	HEX BOLTS	13003
4	WASHERS	33004

